
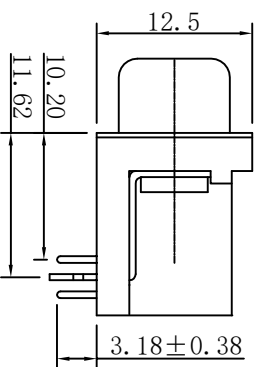


ROHS2.0

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
AO			原始版本 (INITIAL EDITION)	2021.11.11	m t


PIN	a ±0.35	b ±0.25	c ±0.25	插入力 (MAX)	拔出力 (MIN)
9	30.81	24.99	16.92	3.0kgf	0.3kgf
15	39.14	33.32	25.25	5.0kgf	0.45kgf
25	53.04	47.04	38.96	8.5kgf	0.75kgf
37	69.40	63.50	55.42	12.5kgf	1.1kgf

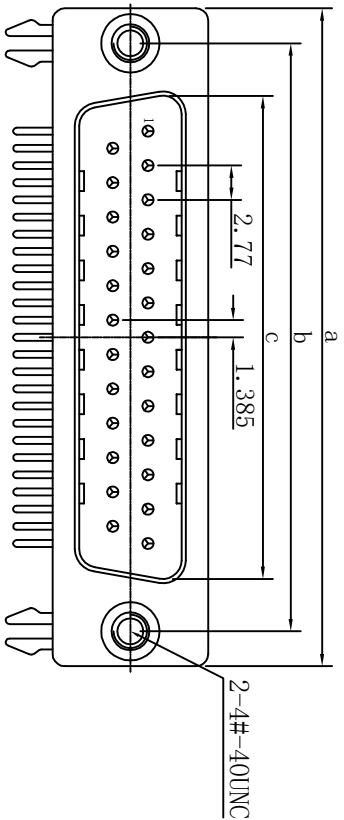

CHARACTERISTICS:

1. RATED VOLTAGE: 250V AC CD
2. RATED CURRENT: 3.0AMP
3. CONTACT RESISTANCE: 30mΩ Max.
4. INSULATION RESISTANCE: 1000 MΩ MIN. 500V DC
5. Electric Pressure: Keeping 60 second in AC 500V/1mA
6. Operating temperature: -55℃~105℃

01.D940XX M X XXX XX A XX

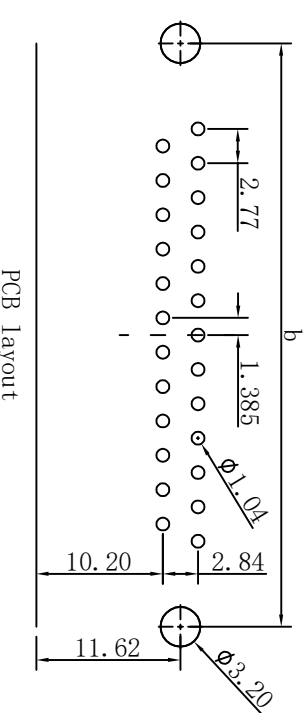

PCB Layout

Specification Type (1:2)

A	B	C	F	G
	4.80	5.80	4.80	5.80

**东莞市跃展精密连接器有限公司**  
 Dongguan Yuezhan Precision Connectors Co., Ltd  
 Tel: +86-769-85318391/2 Fax: +86-769-85318391 Mob: +86-13725200000

DESIGN: 卓涛 2021.11.11	PART NAME: DR9_4 M系列图
CHECKED: 卓涛 2021.11.11	PART NO. 01.D940XXMXXXXXX
APPROVED: 卓涛 2021.11.11	DRAW NO.
SCALE: 1:1 SIZE: A4	SHEET NO. 01 OF 01

PIN Poles  M/F Differentiates  Water Code  
 XX: XX PIN  
 M/F Differentiates  
 M=Male F=Female  
 Hsg Color  5=Yellow  
 1=Black 3=Blue  
 2=White 4=Green 6=Purple  
 Plating  M00:Matte sn  
 G00:Gold flash  
 G01:Gold 1U"  
 G03:Gold 3U"  
 Gxx:Gold XXU"  
 B00:Braight sn  
 B01:Braight sn 1U"  
 B03:Braight sn 3U"  
 Bxx:Braight sn XXU"  
 M01:Matte sn 1U"  
 M03:Matte sn 3U"  
 Mxx:Matte sn XXU"

Specification Type  
 Hsg Material  
 H1=PBT HF H2=PA6T HF H3=PA9T HF  
 H4=PA66 HF H5=LCP  
 I0=PBT I1=PA6T I2=PA9T  
 I3=PA66 I4=PA46